


# Ninox ULTRA 640 SWIR

High resolution, low noise, Deep cooled, digital SWIR camera  
640 x 512 • Cooled to -85°C • <30e in high gain

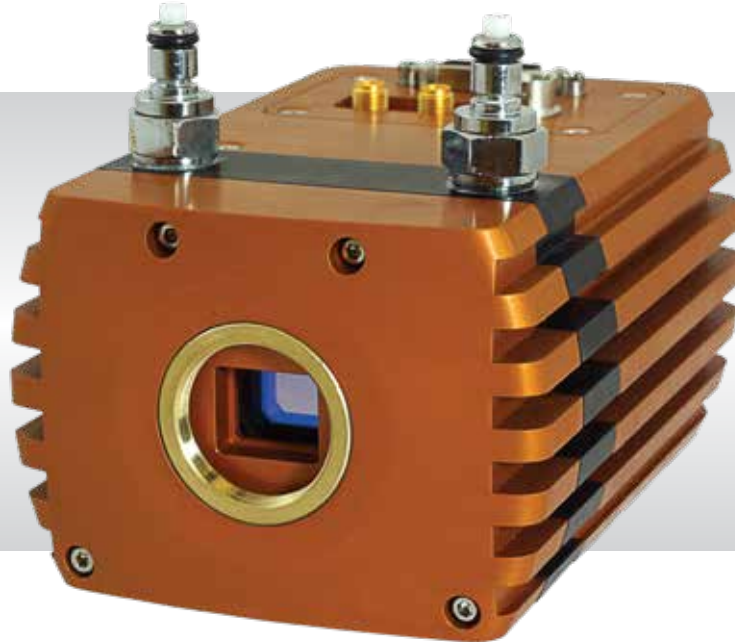

PRELIMINARY

## Key Features and Benefits

*The best performing SWIR camera in the World!*

- **Deep cooled to -85°C with PentaVac, Raptor's Vacuum technology**  
Enables ultra low dark current and longer exposure
- **15µm x 15µm pixel pitch**  
Enables highest resolution SWIR image
- **<30e in high gain**  
Enables highest SWIR detection limit
- **Ultra high intrascene dynamic range - 70dB**  
Enables simultaneous capture of bright & dark portions of a scene

Resolution	<b>640 x 512</b>
Frame Rate	<b>Up to 100Hz</b>
Cameralink	<b>16 bit</b>
Wavelength Range	<b>SWIR</b>
Dark Current	<b>&lt;100 e/p/s</b>

## Specification for Ninox ULTRA 640 SWIR

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	640 x 512
Pixel Pitch	15µm x 15µm
Active Area	9.6mm x 7.68mm
Spectral response <sup>1</sup>	0.9µm to 1.7µm
Noise (RMS)	<80 electrons Low Gain, <30 electrons High Gain
Quantum Efficiency	Peak >77%
Pixel Well Depth	Low Gain: 120ke-, High Gain: 40ke-
Pixel Operability	>99.5%
Dark Current	<100e/p/s @-80°C
Digital Output Format	16 bit
Exposure time	1µs until Saturation (typical 5 minutes)
Shutter mode	Global shutter
Frame Rate	100Hz
Optical Interface	C-mount (selection of SWIR lens available)
Camera Setup / Control	CameraLink
Trigger interface	Trigger IN and OUT - TTL compatible
Power supply	12V DC ±10%
TE Cooling	-85°C with liquid cooling
Image Correction	RAW or 2 point NUC (Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, TEC (ROI to be added via firmware at a later date)
Camera Power Consumption <sup>2</sup>	Total power consumption <100W
Operating Case Temperature <sup>3</sup>	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions	123.14mm x 89.84mm x 64.00mm (additional mounting holes, M4 or M5)
Weight	916g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

## Ordering Information

### Camera

NINOX ULTRA 640 SWIR digital camera	NXU1.7-CL-640
NINOX Power Supply Cable	RPL-HR4-K
Chiller Tubing <sup>4</sup>	RPL-WTUBE-NINOX
Liquid Re-circulator Unit	RPL-RECIRC

### Optional Accessories

EPIX(R) base CL card	RPL-EPIX-EB1
EPIX(R) XCAP STD software	RPL-XCAP-STD
CameraLink Cable, 2m <sup>5</sup>	RPL-CL-CBL-2M
Optical SWIR lenses <sup>6</sup>	RPL-xx-xxxx

Note 1: Optional filters available: Low, High or bandpass

Note 2: Measured @ 30°C

Note 3: Extended Operating Temperature range on request

Note 4: This includes the tube + connectors


Note 5: Longer CL cable available

Note 6: Please consult us to check our range of lenses

Demo is available on request.  
Pricing AOR subject to volumes.

Detailed technical drawings  
can be downloaded at  
[www.raptorphotonics.com](http://www.raptorphotonics.com)

## Quantum Efficiency

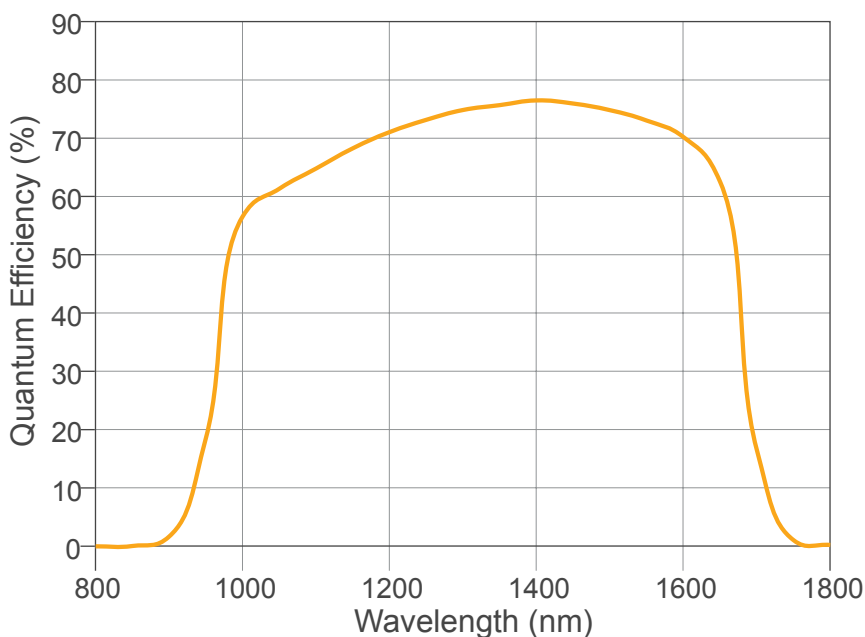

## Applications

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography
- Microscopy
- Art Inspection

Document #: INN XU1.7-CL-640 1118



Willowbank Business Park  
Larne, Co Antrim  
BT40 2SF,  
Northern Ireland

Raptor Photonics Ltd. (UK)  
T: +44(0)2828 270 141  
E: sales@raptorphotonics.com  
[www.raptorphotonics.com](http://www.raptorphotonics.com)

Raptor Photonics Inc. (USA)  
T: +1 (877) 230-4836  
E: sales@raptorphotonics.com  
[www.raptorphotonics.com](http://www.raptorphotonics.com)

