

Kestrel

Digital Scientific Frame Transfer EMCCD

128 x 128 • 24 μ m x 24 μ m pixels • Cooled to -80°C •



Key Features and Benefits

Ultra low noise readout with THE FASTEST speeds

- **500 frames per second**
Full resolution speed making it the fastest EMCCD on the market
- **128 x 128 Back-thinned EMCCD sensor**
Enables optimum image resolution in low light imaging applications
- **16 bit Camera Link output**
Realtime imaging for low latency photon to digital image
- **Up to 95% QE from back-illuminated sensor**
Optimum Photon collection
- **Strong UV and NIR reponse and ultrawide bandwidth**
From 200nm through to 1100nm
- **Deep cooled to -80°C**
For minimal background events

Resolution	128 x 128
Pixel Size	24μm x 24μm
Readout Noise	<1e
Frame Rate	500fps
Camera Link	16bit

PRELIMINARY

Specification for Kestrel

Sensor Type	1/3" Back Thinned Frame Transfer EMCCD
Active Pixel	128 x 128
Pixel Size	24µm x 24µm
Active Area	3.1mm x 3.1mm
Full Well Capacity	160ke-
Shift Register Well Depth	800ke-
Non-linearity	<1%
Readout Noise (RMS)	EM Gain ON: <1 electrons EM Gain OFF: <60 electrons
Full Resolution Frame Rate	>500fps
Dark Current (e/p/s)	0.001 @ -80°C
Digital Output Format	16 bit Camera Link (base configuration)
Peak Quantum Efficiency	95%
Spectral Response	180 - 1100nm
Cooling	-95°C with +10°C coolant
Binning	1 x 1 up to 32 x 32
Lens Mount	C-Mount
Synchronisation	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±10%
Total Power Consumption	<80W
Operating Case Temperature ¹	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H) ²	129mm x 112mm x 94mm
Weight (no lens)	< 1.5kg

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

Kestrel EMCCD digital camera	KE60V-BV-CL
Power Supply Unit	RPL-HR4-K

Optional Accessories

Mini PC with Xcap STD and frame grabber	RPL-PC-EL1
EPIX® EB1 base CL card	RPL-EPIX-EB1
EPIX® XCAP STD software	RPL-XCAP-STD
Camera Link Cable, 2m ³	RPL-MCL-CBL-2M
Thermoelectric Water Chiller Unit	RPL-CHILLER
Chiller Tubing	RPL-WTUBE-NINOX
Optical Lenses ⁴	RPL-xx-xxxx

Note 1: Extended operating temperature range on request.

Note 2: Dimensions include all connector parts on camera interface


Note 3: Longer CL cable available up to 25M

Note 4: Please consult us to check our range of lenses

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

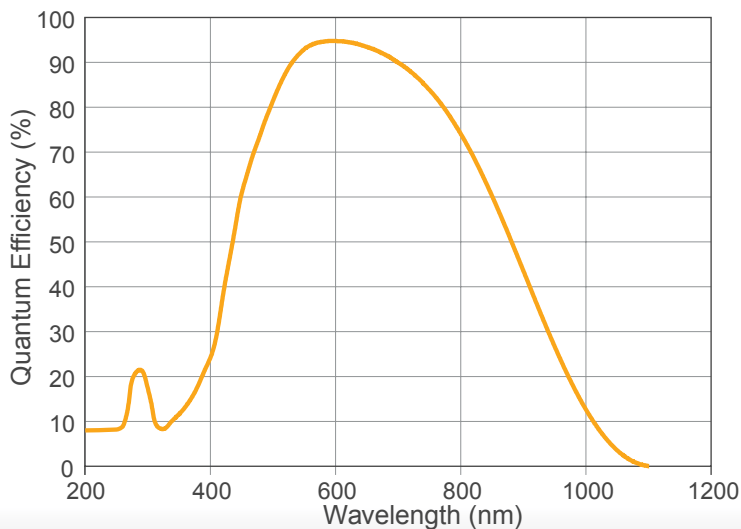

Applications

- Adaptive Optics and Astronomy
- Calcium signaling
- Fluorescence imaging / spectroscopy
- Flow cytometry
- FRET / FRAP / TIRF
- Genome sequencing
- High content screening
- High resolution fluorescence imaging
- Hyperspectral imaging
- Live Cell Imaging
- Photon counting
- Single molecule detection
- Solar cell inspection
- X-ray & High energy

Document #: USKE60V-BV-CL 319