

Ninox 1280 VIS-SWIR

High resolution, low noise, cooled, digital VIS-SWIR camera
1280 x 1024 • Cooled to -15°C • $<50\text{e}$ readout noise in high gain •



Key Features and Benefits

The best performing Scientific VIS -SWIR camera in the World!

- **Cooled VIS-SWIR technology**
Cooled to -15°C . Enables low dark current for longer exposures
- **$10\mu\text{m} \times 10\mu\text{m}$ pixel pitch**
Enables highest resolution VIS-SWIR image
- **<50 electrons readout noise in high gain**
Enables highest VIS-SWIR detection limit
- **Ultra high intrascene dynamic range - 68dB (Typical)**
Enables simultaneous capture of bright & dark portions of a scene
- **On-board intelligent 3 point NUC**
Enables highest quality images

Resolution	1280 x 1024
Frame Rate	10 to 60Hz
Camera Link	12 bit
Wavelength Range	VIS-SWIR
Dark Current	$<1,500$ e/p/s

Specification for Ninox 1280 VIS-SWIR

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	1280 x 1024
Pixel Pitch	10µm x 10µm
Active Area	12.8mm x 10.24mm
Spectral Response ¹	0.4µm to 1.7µm
Readout Noise (RMS) LG = Low Gain HG = High Gain	LG: <190 electrons (160 electrons typical) HG: <50 electrons (47 electrons typical)
Quantum Efficiency	>80% @ 1.55µm
Full Well Capacity	LG: 450ke- HG: 10ke-
Pixel Operability	>99.5%
Dark Current (e/p/s)	<1,500 @ -15°C
Digital Output Format	12bit Camera Link (Medium Configuration)
Exposure Time	LG: 300µs to [Frame Period – Readout Time] HG: 600µs to [Frame Period – Readout Time]
Shutter Mode	Global shutter
Frame Rate	10 – 60Hz
Optical Interface	C-mount (selection of SWIR lens available)
Dynamic Range	LG: 69dB HG: 47dB
Trigger Interface	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±0.5V
TE Cooling	Active, ΔT = 35°C
Image Correction	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ROI
Camera Power Consumption ²	<10w (Typical)
Operating Case Temperature ³	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H) ⁴	87.30mm x 78.86mm x 79.30mm
Weight	550g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

Ninox 1280 VIS-SWIR digital camera	NX1.7-VS-CL-1280
Power Supply Cable	RPL-HR4-K

Optional Accessories

Mini PC with Xcap STD and frame grabber	RPL-PC-EL1
EPIX® E8 base CL card	RPL-EPIX-E8
EPIX® XCAP STD software	RPL-XCAP-STD
Camera Link Cable, 2m (x2) ⁵	RPL-MCL-CBL-2M
Liquid Recirculator Unit ⁶	RPL-RECIRC
Chiller Tubing ⁷	RPL-WTUBE-NINOX
Optical Lenses ⁸	RPL-xx-xxxx

Note 1: Optional filters available: Low, High or bandpass
Note 2: Measured @ 30°C

Note 3: Extended Operating Temperature range on request
Note 4: Dimensions include all connector parts on camera interface

Note 5: Two cables required

Note 6: This includes the chiller and the liquid


Note 7: This includes the tube + connectors

Note 8: Please consult us to check our range of lenses

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

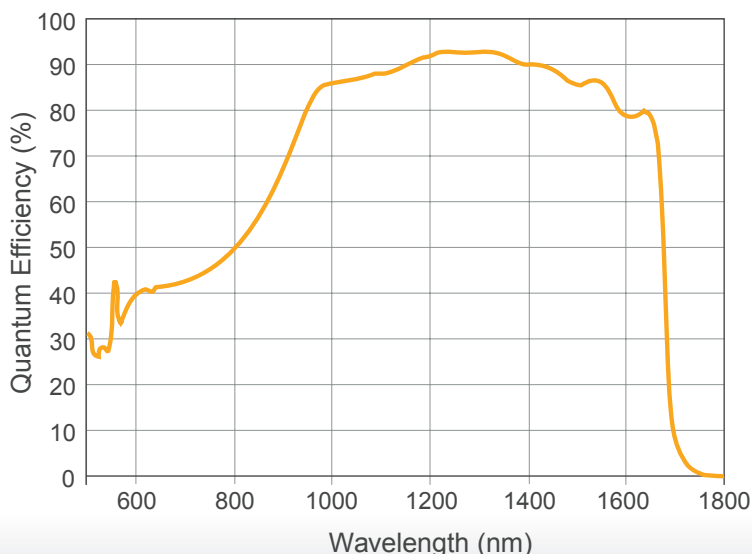

*Data supplied by sensor manufacturer

Applications

- Art Inspection
- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Microscopy
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography

Document #: USNINOX 1.7-VS-CL-1280 319



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

