
Owl 1280 SDI - OEM 7

High resolution, High Sensitivity, Digital VIS-SWIR camera 1280 x 1024 \cdot 10 μ m x 10 μ m Pixel Pitch \cdot 28e- readout noise \cdot

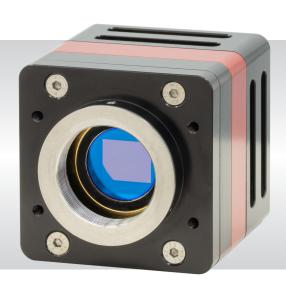

Key Features and Benefits

The best performing HD VIS-SWIR camera in the World!

- 1280 x 1024, 10μm pitch VIS-SWIR technology Enables highest resolution imaging from 0.6μm to 1.7μm
- 28e- electrons readout noise
 Enables highest VIS-SWIR detection limit
- On-board Automated Gain Control (AGC)
 Enables clear video in all light conditions
- On-board Intelligent 3 point NUC Enables highest quality photos
- HD-SDI SMPTE-274M
 Provides full HD resolution 1080p/30
- Removable C-Mount
 Adapt to your own optical configuration

Resolution	1280 x 1024
Frame rate	30Hz
HD-SDI	1080p/30
Wavelength Range	VIS-SWIR

Specification for Owl 1280 SDI

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	1280 x 1024
Pixel Pitch	10μm x 10μm
Active Area	12.8mm x 10.24mm
Spectral response ¹	0.6µm to 1.7µm
Readout Noise (RMS) ² LG = Low Gain HG = High Gain	LG: <190 electrons (160 electrons typical) HG: <50 electrons (28 electrons typical)
Peak Quantum Efficiency	>90% @ 1.3μm
Pixel Well Depth	LG: 450ke- HG: 10ke-
Pixel Operability	>99.5%
Digital Output Format	10 bit serial SMPTE274M 1080 p/30
Exposure time	LG: 50μs to 25.8ms
Shutter mode	Global shutter
Frame Rate	30Hz
Communication	RS422
Optical Interface	C mount (selection of SWIR lens avaliable)
Dynamic Range	LG: 69dB, HG: 51dB
Trigger interface	Trigger IN and OUT - TTL compatible
Power supply	12V DC ±0.5V
TE Cooling	Active
Image Correction	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ROI
Camera Power Consumption ³	<8W with TEC ON, NUC ON
Operating Case Temperature ⁴	-40°C to +71°C
Storage Temperature	-55°C to +85°C
Dimensions (L*W*H) ⁵	68.8mm x 46.0mm x 49.5mm
Weight	200g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors. This product is under the export control of UK government and maybe subject to an Single Individual export licence before shipment.

Ordering Information

Camera

Owl 1280 Digital Camera OW1.7-VS-SD-1280-OEM7
Power & Comms Cable with D-type RPL-SDPC-CBL-D-VERT
Power & Comms Cable without D-type RPL-SDPC-CBL-FL-VERT

Optional Accessories

Optical Lenses⁶ RPL-xx-xxxx

Note 1: Optional filters available: Low, High or bandpass.

Note 2: Typical readout noise is calculated from an average of the last 20 cameras shipped.

Note 3: Measured in an ambient of 25°C with adequate heat sinking. For more detailed power consumption values, please refer to the user manual.

Note 4: Extended operating temperature range on request.


Note 5: Dimensions include all connector parts on the

Note 6: Please consult us to check our range of lenses.

Demo is available on request. Pricing AOR subject to volumes.

Detailed technical drawings can be downloaded at www.raptorphotonics.com

Quantum Efficiency

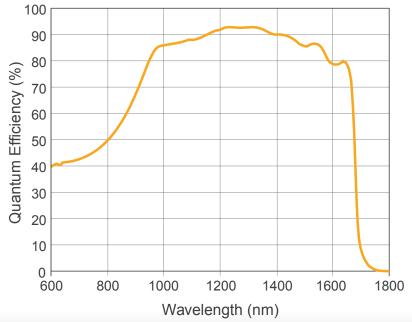

*Data supplied by sensor manufacturer

Applications

Surveillance

- HD long range day / night SWIR imaging
- · Airborne and Ground Payload
- Hand Held Systems
- Driving Vision Enhancement (DVE)
- Airborne EVS
- Vision enhancement

Scientific

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography

Document #: INOW1.7-SD-1280-OEM7 0822



Willowbank Business Park Larne, Co Antrim BT40 2SF, Northern Ireland Raptor Photonics Ltd. (UK) T: +44(0)2828 270 141 E: sales@raptorphotonics.com www.raptorphotonics.com Raptor Photonics Inc. (USA) T: +1 (877) 230-4836 E: sales@raptorphotonics.com

