


Owl 640 T SDI - OEM ONLY

High Resolution, High Sensitivity, Digital VIS-SWIR camera
640 x 512 • 10µm x 10µm Pixel Pitch • <50e readout noise •

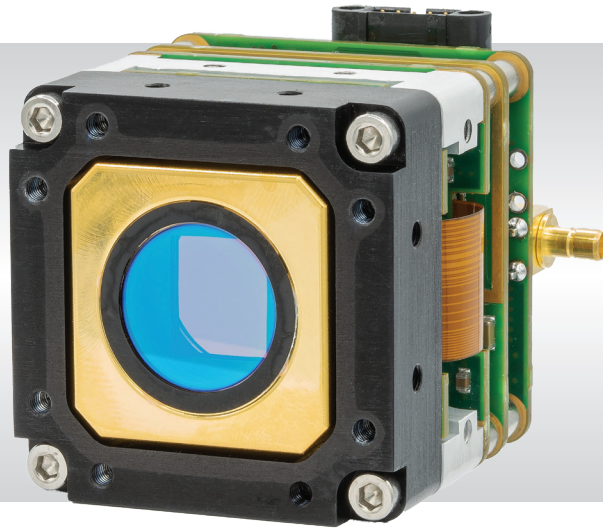

Key Features and Benefits

The World's first SWaP optimised 1/2" / VGA sensor with VIS-SWIR response

- **1/2" Sensor Format**
Better for optical design, ideal for OEM integration into Electro-Optic systems.
- **640 x 512, 10µm pitch VIS-SWIR technology**
Enables highest resolution imaging from 0.6µm to 1.7µm
- **On-board Automated Gain Control (AGC)**
Enables clear video in all light conditions
- **On-board Intelligent 3 point NUC**
Enables highest quality photos
- **HD-SDI SMPTE-274M**
Provides full HD resolution 1080p/30

Resolution	640 x 512
Frame rate	30Hz
HD-SDI	1080p/30
Wavelength Range	VIS-SWIR

Specification for Owl 640 T SDI

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	640 x 512
Pixel Pitch	10µm x 10µm
Active Area	6.4mm x 5.12mm
Spectral response ¹	0.6µm to 1.7µm
Readout Noise (RMS) ² LG = Low Gain HG = High Gain	LG: <190 electrons (160 electrons typical) HG: <50 electrons (47 electrons typical)
Peak Quantum Efficiency	>90% @1.3µm
Pixel Well Depth	LG: 650ke- HG: 10ke-
Pixel Operability	>99.5%
Digital Output Format	10 bit serial SMPTE274M 1080p/30
Exposure time	LG: 1µs to 27.33ms
Shutter mode	Global shutter
Frame Rate	30Hz
Communication	RS422
Optical Interface	C mount (selection of SWIR lens available)
Dynamic Range (Typical)	LG: 71dB, HG: 49dB
Trigger interface	Trigger IN and OUT - TTL compatible
Power supply	12V DC ±0.5V
TE Cooling	Active
Image Correction	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ROI
Camera Power Consumption ³	<8W with TEC ON, NUC ON
Operating Case Temperature ⁴	-40°C to +71°C
Storage Temperature	-55°C to +85°C
Dimensions (L*W*H) ⁵	68.8mm x 46.0mm x 49.5mm
Weight	200g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors. This product is under the export control of UK government and maybe subject to an Single Individual export licence before shipment.

Ordering Information

Camera

Owl 640 T Digital Camera	OW17-VS-SD-640-T
Power Supply Cable	RPL-M80-9411005

Optional Accessories

Optical Lenses ⁶	RPL-xx-xxxx
-----------------------------	-------------

Note 1: Optional filters available: Low, High or bandpass.

Note 2: Typical readout noise is calculated from an average of the last 20 cameras shipped.

Note 3: Measured in an ambient of 25°C with adequate heat sinking. For more detailed power consumption values, please refer to the user manual.

Note 4: Extended operating temperature range on request.


Note 5: Dimensions include all connector parts on the camera interface.

Note 6: Please consult us to check our range of lenses.

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

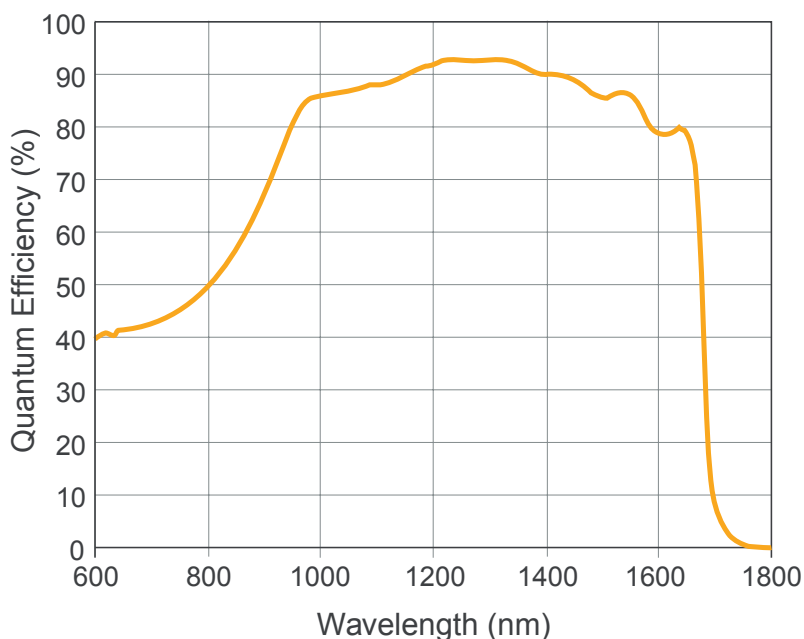

*Data supplied by sensor manufacturer

Applications

Surveillance

- HD long range day / night SWIR imaging
- Airborne and Ground Payload
- Hand Held Systems
- Driving Vision Enhancement (DVE)
- Airborne EVS
- Vision enhancement

Scientific

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography

Document #: INOWL17-VS-CL-640 T SDI 0322



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

