

Falcon III – XV

In-Vacuum • Scientific Frame Transfer EMCCD •

• 1024 x 1024 • 10µm x 10µm Pixel Pitch • Cooled to -70°C • 31Hz Full Frame •



Key Features and Benefits

Fastest scientific x-ray camera on the market

- **In-Vacuum**
High energy in-vacuum direct detection
- **Back illuminated with no coating**
Optimises sensitivity and large field of view imaging from 12eV to 20keV
- **Fast frame rate in full frame resolution: 31Hz**
Ideal for fast repetition rates
- **Deep cooled to -70°C**
For minimal background events

Resolution	1024 × 1024
Pixel Size	10µm x 10µm
Readout Noise	<1e-
Frame Rate	31Hz
Camera Link	16bit

Specification for Falcon III – XV

Sensor Type	1" Back Thinned Frame Transfer EMCCD
Active Pixel	1024 x 1024
Pixel Size	10µm x 10µm
Active Area	10.2mm x 10.2mm
Full Well Capacity	>29ke-
Shift Register Well Depth	200ke-
Non-Linearity	<1%
Readout Noise (RMS) ¹	EM Gain ON: <1e- EM Gain OFF: <55e-
Full Resolution Frame Rate	31Hz
Exposure Time ²	1ms to >1hr
Dark Current (e/p/s)	0.001 @ -70°C
Digital Output Format	16 bit Camera Link (base configuration)
Peak Quantum Efficiency	>95%
Spectral Response	12eV - 20keV
Cooling ³	-70°C with 20°C liquid
Binning	1x1 up to 8x8
Synchronisation	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±10%
Total Power Consumption	<75W (TEC ON, Steady State)
Operating Case Temperature	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H)	129mm x 112mm x 94mm
Weight	<2.5kg

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

Falcon III –XV EMCCD 1MP	FA351XV-BN-CL
Power Supply Unit	FA-PSU-III
Falcon III-XV Power Feedthrough	RPL-PFC-F3
Falcon III-XV Camera Link Feedthrough	RPL-CLFC

Optional Accessories

Mini PC with XCAP Std and frame grabber	RPL-MINI-EL1
EPIX® EB1 frame grabber	RPL-EPIX-EB1
EPIX® XCAP Std software	RPL-XCAP-STD
Camera Link Cable (2m) ⁴	RPL-MCL-CBL-2M
Thermoelectric Water Chiller Unit	RPL-CHILLER
Water Feedthrough	RPL-WFC
Trigger Feedthrough	RPL-TFC

Note 1: Measured at 10MHz pixel readout speed.

Note 2: In practice, the maximum exposure time will be dark current limited.


Note 3: For important information about the vacuum pressure requirement before using the TEC, please refer to the user manual.

Note 4: Longer Camera Link cable available.

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

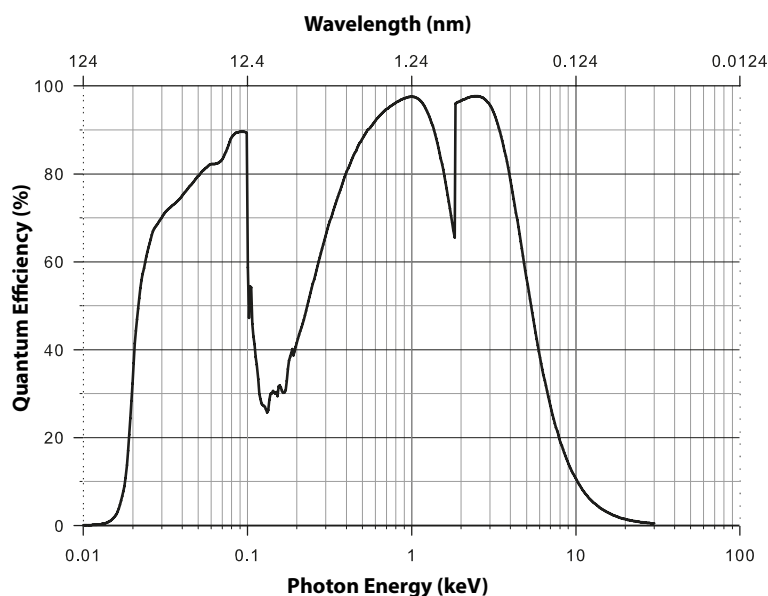

Applications

Scientific

- X-Ray Imaging
- X-Ray Diffraction (XRD) and X-Ray Fluorescence (XRF)
- X-Ray Plasma Imaging and Diagnostics
- Soft X-Ray Microscopy
- EUV X-Ray Spectroscopy
- X-Ray source characterization
- X-Ray Phase Contrast Imaging
- X-Ray Tomography
- VUV/EUV/XUV Imaging and Lithography
- Crystallography

Document #: INFA351XV-BN-CL 0920



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

