


Owl 320 HS

High speed, digital VIS-SWIR camera

320 x 256 • 30µm x 30µm Pixel Pitch • Frame Rate up to 349Hz •

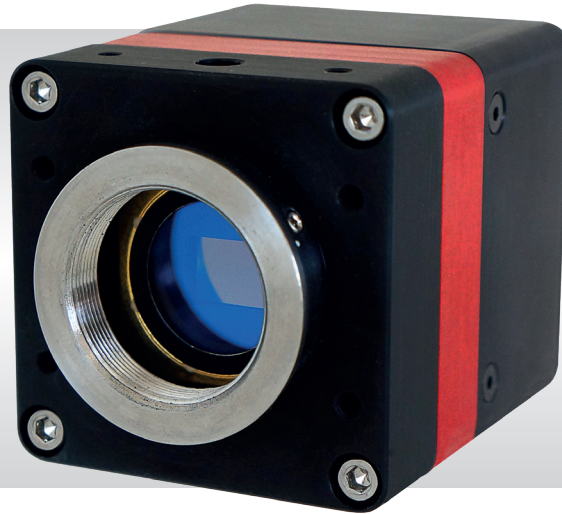

Key Features and Benefits

High-Speed VIS-SWIR Technology

- **VIS-SWIR technology**
Enables high speed imaging from 0.4µm to 1.7µm
- **Easy control of camera parameters**
Control of Exposure, Frame rate, Gain, Temperature, trigger, etc
- **High Speed - up to 349Hz in full frame resolution**
Perfect for Hyperspectral Imaging applications
- **Rugged, No fan**
Enables integration into UAV, handheld or Electro-Optic systems

Resolution	320 x 256
Full Frame Rate	up to 349Hz
Camera Link	14 bit
Wavelength Range	VIS-SWIR

Specification for Owl 320 HS

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	320 x 256
Pixel Pitch	30µm x 30µm
Active Area	9.6mm x 7.68mm
Spectral response ¹	0.4µm to 1.7µm
Readout Noise (RMS) ²	High Gain: <225 electrons (202 electrons typical)
Peak Quantum Efficiency	>90% @1.3µm
Full Well Capacity	High Gain: 170ke-
Pixel Operability	>99%
Digital Output Format	14 bit Camera Link (Base Configuration / SDR)
Exposure time	500ns to [Frame Period – Readout Time]
Frame Rate ³	Up to 349Hz
Dynamic Range (Typical)	High Gain: 59dB
Trigger interface	Trigger IN and OUT – TLL compatible
Image Correction ⁴	2 point NUC (offset & gain) + pixel correction
Optical Interface	C mount (selection of SWIR lens available)
Power supply	12V DC ±0.5V
TE Cooling	Active
Camera Power Consumption ⁵	<6W with TEC ON, NUC ON
Operating Case Temperature ⁶	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H) ⁷	74.59mm x 50.00mm x 50.00mm
Weight	250g
Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.	

Ordering Information

Camera

Owl 320 HS Digital Camera	OW17-VS-CL-S
Power Supply Cable	RPL-HR4-K

Optional Accessories

Mini PC with XCAP Std and frame grabber	RPL-PC-EL1
EPIX® EB1 frame grabber	RPL-EPIX-EB1
EPIX® XCAP Std software	RPL-XCAP-STD
MDR-SDR Camera Link Cable ⁸	RPL-MCL-CBL-2M
Optical Lenses ⁹	RPL-xx-xxxx

Note 1: Optional filters available: Low, High or bandpass

Note 2: Typical readout noise is calculated from an average of the last 20 cameras shipped.

Note 3: Higher frame rates available when using ROI.

Note 4: NUC is not active when using ROI.

Note 5: Measured in an ambient of 25°C with adequate heat sinking. For full detailed power consumption values, please refer to the user manual.

Note 6: Extended operating temperature range on request.

Note 7: Dimensions include all connector parts on the camera interface.


Note 8: Longer Camera Link cable available.

Note 9: Please consult us to check our range of lenses.

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

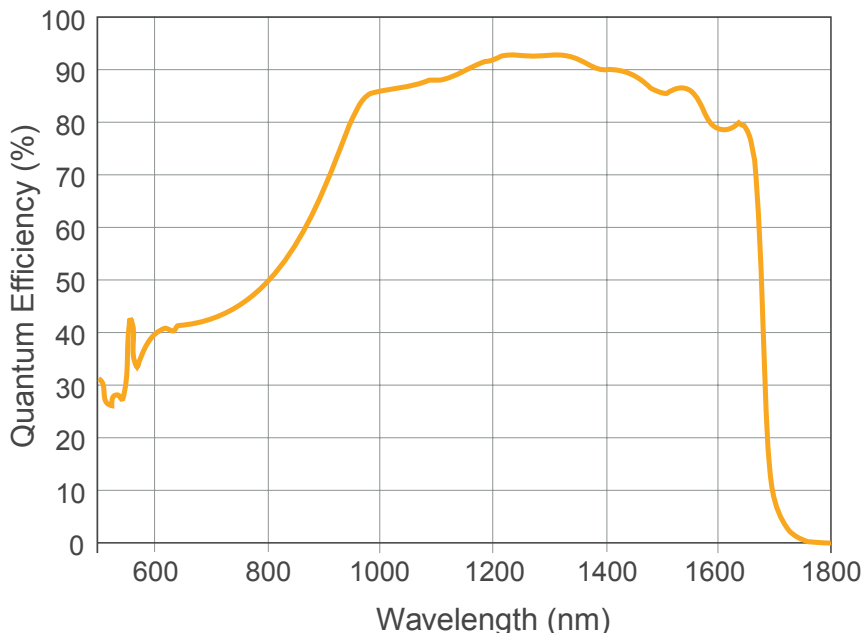

*Data supplied by sensor manufacturer

Applications

Scientific

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography

Document #: INOW17-VS-CL-S 1020



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

